


SPREAD AXLE LOWBOY SERIES

Talbert
SINCE 1938

60CC/55SA-LD

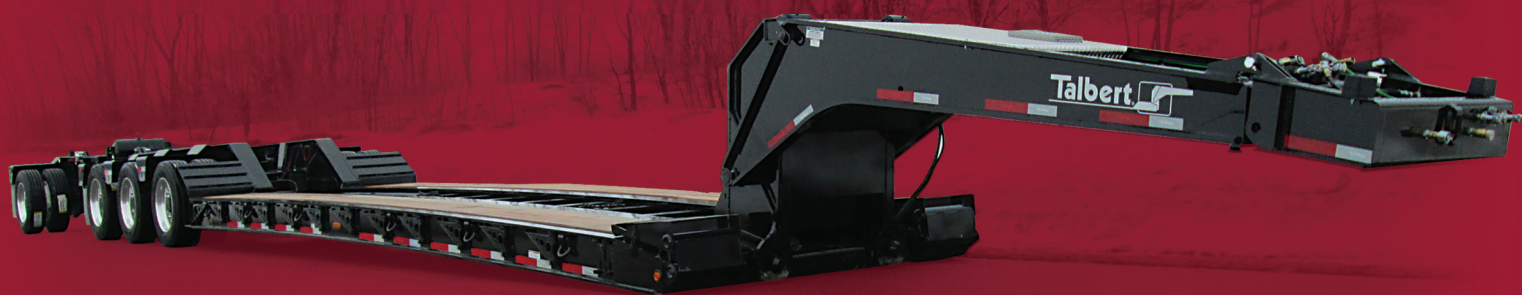

**60CC/
55SA-LD**



Optional 24 in. flip gooseneck extension (increasing swing radius to 132 in.) allows greater load transfer capability.




Allows users to operate as a 3+1 spread-axle with the E1Nitro™. Can also function as four axle close coupled.



With an industry-leading 18 in. loaded deck height, the 60CC/55SA-LD offers state-of-the-art load versatility.

A red hydraulic excavator arm is shown vertically, with the bucket at the top. The arm is red with black hydraulic cylinders and hoses. The bucket is black with a white rim. The background consists of bare trees and a clear blue sky.

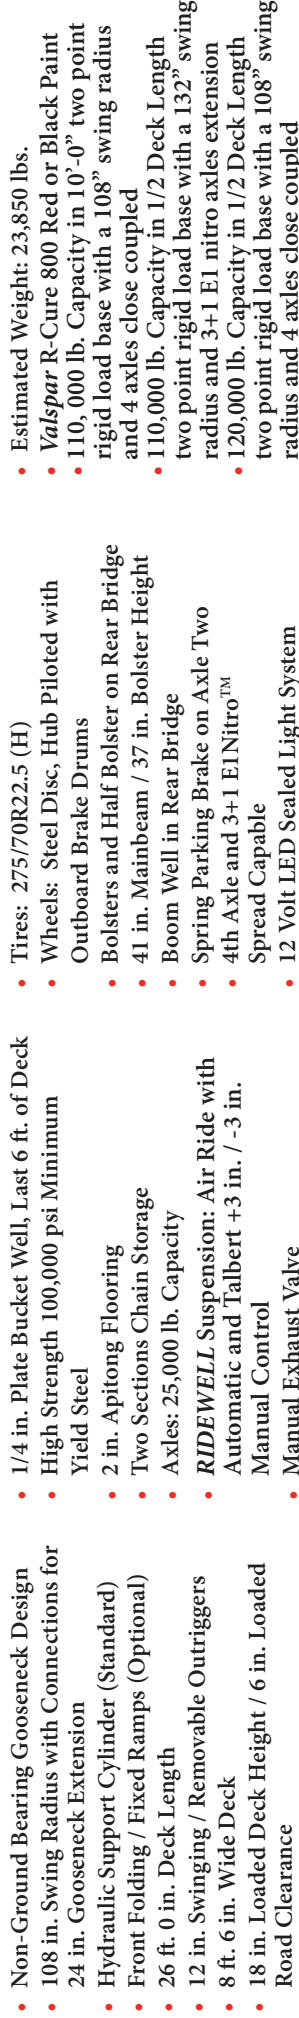

Technical drawing of a truck chassis showing dimensions and components. The drawing includes the following labels and dimensions:

- Dimensions:**
 - Overall length: 68'-7"
 - Front overhang: 14'-0"
 - Front overhang (alternative): 132"
 - Front overhang (alternative): 108"
 - Front overhang (alternative): 20"
 - Front overhang (alternative): 16"
 - Front overhang (alternative): 52"
 - Front overhang (alternative): 39'-10"
 - Front overhang (alternative): 14'-1"
 - Front overhang (alternative): 54"
 - Front overhang (alternative): 54"
 - Front overhang (alternative): 37'-41"
 - Front overhang (alternative): 28'-7"
 - Front overhang (alternative): 26'-0"
 - Front overhang (alternative): 68'-7"
- Components:**
 - OPTIONAL 24" GOOSENECK EXTENSION
 - SUPPORT ARM
 - 6 LASH RING EACH SIDE OF DECK
 - 8 LASH RING BETWEEN DECK WANGBEAMS
 - DECK BUCKET WELL IN LAST 6'-0"
 - 18" LOADED DECK HEIGHT
 - RECESSED CROSSMEMBERS IN REAR BRIDGE SECTION
 - OPTIONAL E[NITRO]™ (3+1)
 - OPTIONAL 4TH AXLE
 - OPTIONAL: 60" AXLE SPRINGS

Dealer: